

Washroom Accessories



Hand Dryers | Soap Dispensers | Paper Towel Dispensers

Jaquar
experience bathing

—

|

|

—

—

|

|

—

India's largest and most trusted Complete bathing solution brand, Jaquar, now brings you high-performance washroom accessories specially designed for use in premium public facilities. Created in technical collaboration with the world-renowned Mediclinics, Spain, the range includes state-of-the-art Hand Dryers, Soap Dispensers and Paper Towel Dispensers, among others.

Jaquar Washroom Equipment is manufactured to meet global safety and quality standards, apart from being in line with ISO 9001 guidelines and abiding by the most widely-recognised certification from bodies like TUV Rheinland, VDE, GreenSpec, UL, CSA and GOST, to name a few.

Choose Jaquar Washroom Equipment to experience world class performance from brilliantly designed devices that come with the assurance of India's largest integrated customer service network.

Quick Guide



LOW TRAFFIC
This model is suitable for installation in areas with low traffic.



LOCK WITH KEY



MEDIUM TRAFFIC
This model is suitable for installation in areas with medium traffic.



NUTS AND BOLTS INCLUDED
This model includes the nuts and bolts necessary for it to be installed on masonry walls.



HIGH TRAFFIC
This model is suitable for installation in areas with high traffic.




BIOCOTE
Anti-microbe treatment for Dualflow Plus hand dryers.



ELECTRICAL PROTECTION
This model incorporates elements that ensure electrical insulation.



ADA STANDARD
Model which, when installed correctly, complies with the Accessibility Guidelines for Buildings and Facilities ADAAG (USA).




LOW ELECTRICITY CONSUMPTION
Eco-efficient hand dryer with low electricity consumption/high energy savings.



UNE STANDARD
Model which, when installed correctly, complies with the Standard for Accessibility in Buildings. Hygienic and health spaces UE 41523.



VALUE FOR MONEY
This model offers excellent value for money.



UNITS PER BOX
Unit quantities per box.



VANDAL-PROOF
This model incorporates elements or features that make it difficult or impossible to damage or remove.

Index

1	HAND DRYERS	Dualflow Plus Speedflow Optima Smartflow	08-09 10-11 12-13 14-15	
2	SOAP DISPENSERS	Push Button Automatic	18 19	
3	PAPER TOWEL DISPENSERS	Wall Mounted	22-23	
4	ANNEXES	Advice on cleaning stainless steel	24	

hand dryers


designed

to caress

your hands



Ranges:

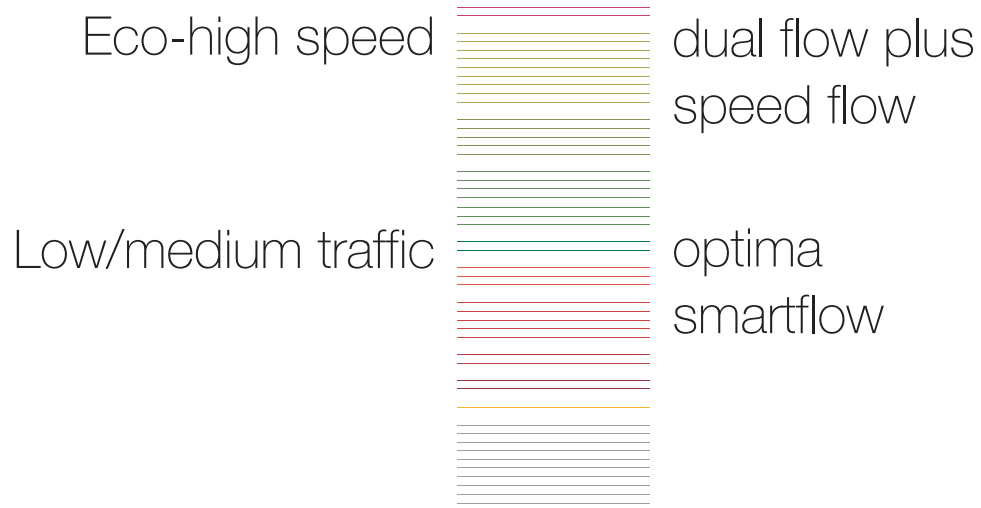



Eco-high speed range

This range is based on three state-of-the-art families which represent JAQUAR commitment to developing products with environmentally-friendly features.

Launched on the market in the last five years, they have four main objectives which are detailed below.

Energy savings:

New technology in the design, construction and components means that these models use far less energy than traditional ones.

Demonstration:

A conventional 2,300 W appliance consumes an average of 19.16 W per drying cycle, hence:


DUALFLOW PLUS:

Adjusted to its minimum power, 420 W, it consumes an average of 1.9 W per drying cycle, achieving energy savings in excess of 90%.

Adjusted to its maximum power, 1,100 W, it consumes an average of 3.28 W per drying cycle: this represents energy savings of over 80%.

SPEEDFLOW:

With a total power of 1,150 W, it consumes an average of 3.83 W per drying cycle, also achieving energy savings of over 80%.

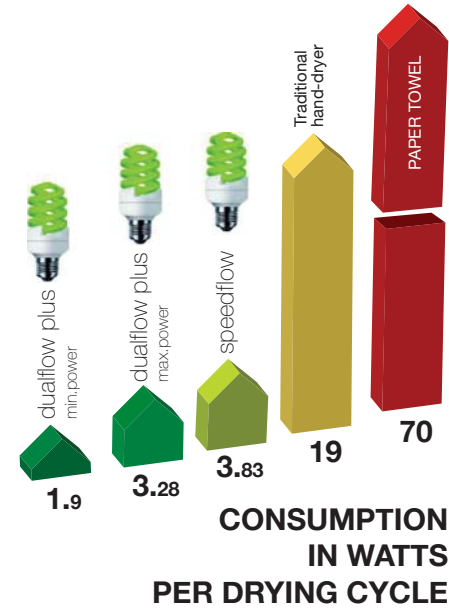

Ultra-fast drying time:

Between 8 and 12 seconds thanks to the high-speed motors that make this range the fastest on the market.

Demonstration:

The usual drying time of conventional machines is over 30 seconds, so the **SPEEDFLOW AND DUALFLOW PLUS** families are four times faster. They are unquestionably some of the fastest hand-dryers in the world.

Caring for the environment:

By using less energy and drying in less time, these models are more sustainable and emit fewer emissions into the atmosphere.

Demonstration:

It is estimated that a traditional dryer, when used normally, emits some 500 kg of CO2 per year. Therefore:

DUALFLOW PLUS: Annual average of 237 kg of CO2 = 53% lower CO2 emissions.

SPEEDFLOW: Annual average of 247 kg of CO2 = 51% lower CO2 emissions.

Minimum noise pollution:

In the high-speed hand-dryer segment, this environmentally-friendly range has been designed and equipped to minimise noise levels. The maximum levels ranges from 64 dB to 75 dB; these are the lowest levels on the market, bearing in mind that other high-speed models exceed 80 dB.

Demonstration:

It is estimated that the noise from a conventional vacuum cleaner is 90 dB, so these two models would be between 17% and 29% below this level.

This eco-high speed range has been designed specifically for installation in new buildings and renovation projects. And, in general, and building which in addition to design and speed criteria is also seeking a hand dryer with environmentally-friendly credentials. New schools, universities and offices, the hotel and restaurant industry, and any other building with a high flow of traffic are the ideal locations for this new generation of hand dryers.

dualflow plus
speed flow



Ecological
like nature itself

HAND DRYERS

dualflow plus

- Minimum energy consumption.
- Ultra-fast drying time.
- Minimum CO₂ emissions.
- Minimum noise level in its category.



HAND DRYERS

dualflow plus



M12A

material: ABS
finish: white

Over **73%**
Saving in energy
consumption
compared to
equivalent dryers.

Dry Hands in
Just 8 Seconds




M12A ||| COMPONENTS AND MATERIALS

- High speed Class F universal brush motor. No heating element.
- PA6 V0 ABS cover.
- Motor power adjustable, allowing electricity consumption to be regulated.
- 2 IR sensors in both sides for automatic hands detection.
- Filter with antimicrobial treatment which avoids the spread of bacteria. SurfaceAide™ XL.
- Internal tank to collect the water. The water tank is emptied by an outside valve.
- Acoustic and optical warning of full water tank.
- Frontal leds showing the status of the hand dryer.
- An optional odor neutralizer for a cleaner and more pleasant atmosphere in the bathroom.
- Proven antimicrobial and antibacterial protection using silver ion technology from Biocote®, resisting the growth of microbes e.g. bacteria and moulds, complementing the cleaning routines.

M12A ||| TECHNICAL SPECIFICATIONS

Cover thickness	3 mm	Protection level	IPX4
Voltage	220-240 V	Automatic disconnection	30 seconds
Frequency	50/ 60 Hz	rpm	19,000 – 30,000
Electrical insulation	Class II	Air temp.(d=10 cm and room temp.= 21°C)	40°C
Power consumption	3,2 – 5 A	Estimated drying time	8-10 sec
Weight	8,3 Kg	Noise level (at 2 m)	65-68 dB
Max. air velocity	410 Km/ h		
Total power	420-1100 W		

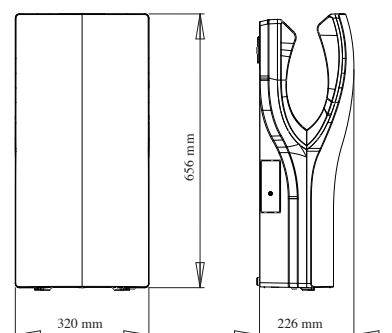

HAND DRYERS speedflow

- Minimum energy consumption.
- Ultra-fast drying time.
- Minimum CO₂ emissions.
- Minimum noise pollution.



HAND DRYERS

speedflow

Sensor Operated



M06ACS

material: AISI 304 stainless steel
finish: satin




M06ACS ||| COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two safety screws and lock with special speedflow® key.
- Aluminium base. Includes silent-blocks to damp mechanical vibrations.
- Fire resistant plastic UL 94-V0 fan scroll.
- High-speed motor with safety thermal cut-off. The motor revolutions can be adjusted manually by the potentiometer.
- Aluminium centrifugal double asymmetrical inlet fan wheel.
- Disconnects automatically after 60 seconds of continuous use.
- Electronic infrared detection sensor. Adjustable detection by potentiometer (5- 25 cm).
- Ultra-flat: 10 cm deep (complies with ADA regulations).
- The electronic plate detects whether the motor brushes have worn out, turning off the hand dryer as an additional safety measure.
- Universal voltage.

M06ACS ||| TECHNICAL SPECIFICATIONS

Cover thickness	1.5 mm	Total power	1150 W
Voltage	100-120 V, 208 V, 220-240 V	Motor power	250 W
Frequency	50/ 60 Hz	Heating element power	900 W (450 + 450W)
Electrical insulation	Class I	Protection level	IP23
Weight	3.6 Kg	Nominal air flow	73-118 m ³ /h/1217-1967 l/min
Effective air flow	61-98 m ³ /h/1017-1634 l/min	Air temp.	(d=10 cm and room temp.=21°C) 41-44°C
Power consumption	4.8 A (240 V), 9.5 A (120 V)	Estimated drying time	10-12 sec
rpm.	3,800-8,200	Noise level	64-74 dB (at 2m)
Air velocity	90-180 Km/h		

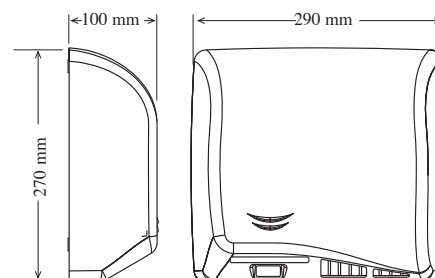

HAND DRYERS optima

- Optimum performance/consumption ratio.
- For installing in areas with medium traffic.
- Sensor operated.



HAND DRYERS
optima

Sensor Operated



M99ACS

material: AISI 304 stainless steel
 finish: satin




M99ACS ||| COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with 4 Allen bolts.
- Base in ABS thermoplastic UL 94-V0.
- Thermoplastic fan wheel PA6 UL 94-V0.
- Class F induction motor incorporating a safety thermal cut-off.
- PP UL 94-V0 aluminium centrifugal single inlet fan wheel.
- Heating element incorporating a safety thermal cut-off.
- Electronic infrared detection sensor. Adjustable detection adjustable (15-25 cm).
- Zamak air outlet grill.

M99ACS ||| TECHNICAL SPECIFICATIONS

Cover thickness	1.5 mm	Air velocity	65 Km/h
Voltage	220-240 V	Total power	1640 W
Frequency	50/ 60 Hz	Motor power	140 W
Electrical insulation	Class II	Heating element power	1500 W
Power consumption	7 A	Protection level	IP21
Weight	4.25 kg (M99ACS) 4.45 kg (M99A)	rpm.	2800
Estimated drying time	38 seconds	Air temp. (d=10 cm and room temp. = 21°C)	52° C
Effective air flow	240 m ³ /h/4000 l/min	Noise level (at 2 m)	60 dB
Nominal air flow	280 m ³ /h/4670 l/min		

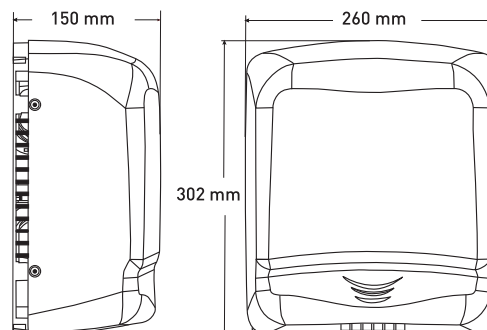

HAND DRYERS smartflow

- Optimum performance/consumption ratio.
- For installing in areas with low to medium traffic.
- Sensor operated.



HAND DRYERS

smartflow

Sensor Operated



M04A

material: ABS
finish: white




M04A ||| COMPONENTS AND MATERIALS

- One-piece cover in ABS thermoplastic. Fixed to the base by two screws.
- Thermoplastic PP + talcum base.
- Class B brush motor incorporating a safety thermal cut-off.
- PP UL94-V0 helicoidal fan wheel.
- Heating element incorporates a safety thermal cut-off.
- Electronic infrared detection sensor with an adjustable detection distance (15-25 cm).

M04A ||| TECHNICAL SPECIFICATIONS

Cover thickness	3 mm	Total power	1100 W
Voltage	220-240 V	Motor power	150 W
Frequency	50/ 60 Hz	Heating element power	950 W
Electrical insulation	Class II	Protection level	IP23
Power consumption	4.8 A	rpm.	15000
Weight	1.2 Kg	Air temp. (d=10 cm and room temp.= 21°C)	47° C
Effective air flow	96 m ³ /h/1600 l/min	Estimated drying time	39 seconds
Nominal air flow	110 m ³ /h/1833 l/min	Noise level (at 2 m)	60 dB
Air velocity	85 Km/h		

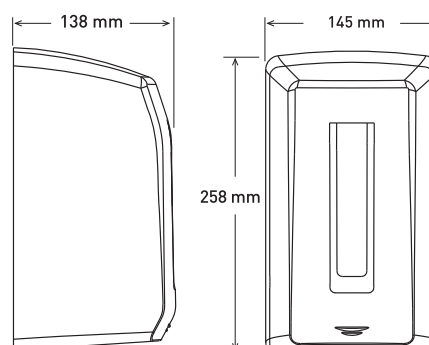

soap dispensers

our goal
is to ensure
your well-being



SOAP DISPENSERS

push button



DJ0010F

capacity: **1.1L**

material: **ABS**

finish: **white/smoked**




DJ0010F ||| COMPONENTS AND MATERIALS

DJ0010F:

- ABS thermoplastic lid.
- Standard lock and key.
- ABS thermoplastic push-button.
- SAN thermoplastic tank.
- Corrosion-resistant anti-drip valve.
- Suitable for chlorine-free hand soap with a neutral pH.
- Suitable for disinfectant solutions, liquid soaps or hydroalcoholic gel.

DJ0010F ||| TECHNICAL SPECIFICATIONS

DJ0010F	
Thickness	3 mm
Weight (empty)	0.3 Kg
Suitable soaps	dermatological, disinfectant,
Quantity dispensed per pump	1-1.2 ml
Recommended installation height	15-20 cm to countertop

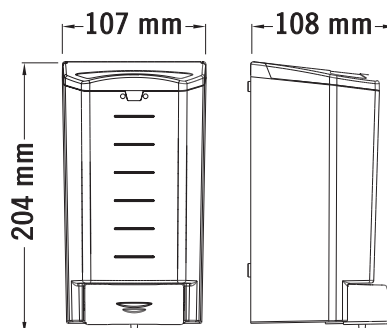

SOAP DISPENSERS automatic



DJ0160AS

capacity: **0.8L**

material: aluminium/ABS

finish: chrome/black



DJ0160AS ||| COMPONENTS AND MATERIALS


DJ0160AS:

- Automatic operation triggered by infrared sensors.
- LED flashes when the batteries need to be replaced.
- Suitable for neutral pH, chlorine-free liquid hand soap.
- Suitable for disinfectant solutions, liquid soaps or hydroalcoholic gel.
- Content viewer on the front.
- Lock and special key supplied.
- Transparent polyethylene tank.
- ABS body with aluminium cover.
- Adjustable distance detector for 8-15 cm.

DJ160AS ||| TECHNICAL SPECIFICATIONS

DJ0160AS

Weight (empty)	0.75 Kg
Quantity dispensed per pump	1 ml
Suitable soaps	dermatological, disinfectant
Recommended installation height	15-20 cm countertop



paper towel dispensers

our goal is to win
your trust



PAPER TOWEL DISPENSERS



PAPER TOWEL DISPENSERS TOWELS WITH C/Z FOLDS

wall mounted



DT0106CS

capacity: **400-600 C/Z towels**
 material: AISI 304 stainless steel
 finish: satin




DT0106CS ||| COMPONENTS AND MATERIALS

- Fully welded structure.
- The towel tray opening has bound edges to minimise tearing of paper towels.
- Door fixed to the body with two rivets, allowing it to be swung open for replenishment.
- Slot for viewing content level on the front.
- Lock with standard key.

DT0106CS ||| TECHNICAL SPECIFICATIONS

Body thickness	0.8 mm
Weight (empty)	1.8 Kg
Towels	max. 260 x 100 mm
Towel capacity folded in C/Z	400-600 u
Recommended installation height	130-160 cm at lower point
Installation height	85-120 cm at lower point

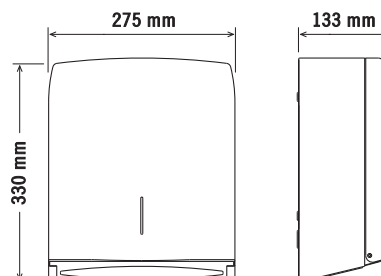

ANNEXES

advice on cleaning stainless steel

GENERAL INSTRUCTIONS

- Before applying any treatment, totally remove the plastic protection from the stainless steel.
- As a general rule, use only a gentle cloth dipped in soapy water.
- Always dry the treated surface using a gentle cloth.
- Applying certain cleaning treatments can change the tone of a piece "D5s finish therefore it may be necessary to treat the entire piece.
- Do not use rough cloths, paper cloths or scouring pads.
- In the cleaning process never use bleach, products based on hypochlorite dissolutions, liquids made with strong acids, frequently used in the floor and wall cleaning, nor hydrochloric acid or products containing petrol.
- Pay special attention to the components of cleaning products, especially those specifically for cleaning bathrooms.
- In exceptional cases, polish very specific areas and with extreme care. Subsequently, apply a soft cloth dipped in soapy water and dry thoroughly.
- The printed markings come off easily when these cleaning processes are applied. Therefore, when possible, prevent application on top of the logos or other printed markings.

CLEANING SPECIFICATIONS

	CLEANING PRODUCT	CLEANING METHOD
REGULAR CLEANING	<ul style="list-style-type: none"> • Gentle domestic liquid soap. • Water. 	<ul style="list-style-type: none"> • Use a duster, a washing cloth or soft sponge, dipped in soapy water. • Dry the treated surface. • If the product is subjected to hostile environments, such as salt (near the sea), intense humidity, chlorine (Swimming pools), hard water, etc. a further treatment in addition to regular cleaning is recommended involving the application of a household product containing silicon.
MEDIUM RESISTANCE STAINS (e.g.: fingerprints)	<ul style="list-style-type: none"> • Same as above. • Specific household products for stainless steel, such as "Tarni Shield Inox" manufactured by 3M. 	<ul style="list-style-type: none"> • Proceed in the same way as with regular cleaning. If using specific household products, follow the manufacturer's instructions, ensuring that the product is in liquid or cream form. If using sprays, apply the product onto the cloth, not directly onto the surface to be treated.
HIGH RESISTANCE STAINS (e.g.: decolouration due to atmospheric agents)	<ul style="list-style-type: none"> • If the processes above do not provide satisfactory results, use, with care, household products for cleaning chrome, degreaser or dissolving designed for tin or copper, since they can affect the colour of the steel. The product "Tarni Shield Inox" recommended above can be useful in these cases. 	<ul style="list-style-type: none"> • Proceed in the same way as with regular cleaning. If using specific household products, follow the manufacturer's instructions, ensuring that the products are in liquid or cream form. Before treating the entire affected surface, carry out a test on a small area.
MINERAL STAINS (e.g.: limescale or hard water)	<ul style="list-style-type: none"> • Dilute 5% of white vinegar in water. • Specific household products for treating limescale, with a silicon protector base (containing acetic or phosphoric acid). 	<ul style="list-style-type: none"> • Proceed in the same way as with regular cleaning. If using specific household products, follow the manufacturer's instructions. Before treating the entire affected surface, carry out a test on a small area.
RUST STAINS CAUSED BY INADEQUATE CLEANING	<ul style="list-style-type: none"> • Any of those mentioned above, excluding those indicated for high resistance stains. You can use "Scotch Brite special non-scratch for vitro-ceramics by 3M". 	<ul style="list-style-type: none"> • Polish gently and carefully using the 3M Scotch Brite in the direction of the grain or lines. *NOTE: This method only applies to satin finishes (rough polish), never to bright finishes (high polish).

JAQUAR AND COMPANY PVT. LTD.

306, Udyog Vihar, Phase-II, Gurgaon-122016 (INDIA),
Ph.: 91-124-4746800 (30 Lines). Fax: 91-124-2346531/32.
E-mail: Sales: support@jaquar.com, Customer Service: service@jaquar.com

ORIENTATION CENTRES:

AHMEDABAD: Ground Floor,
Commerce House-4, B/S Reliance Petrol Pump,
Near Anand Nagar Cross Roads, 100 Ft. Road,
Prahlad Nagar, Satellite, Ahmedabad.
E-mail: ahmedabad@jaquar.com

BANGALORE: No. 10, V.N. Street,
Next to Hotel Ramada, Shivaji Nagar,
Tasker Town, Bangalore-560051. Fax: 22862518.
E-mail: bangalore@jaquar.com

BHOPAL: Shop No. 7, 3rd Floor, City Center,
Above Lotus, 1 Press Complex, M. P. Nagar,
Zone-1, Bhopal- 462011.
E-mail: bhopal@jaquar.com

BHUBANESWAR: Plot No. 853/1671, 2nd Floor,
Jharpada, Cuttack Road, Bhubaneswar-751006.
E-mail: bhubaneswar@jaquar.com

CHANDIGARH: S.C.O. 215-16-17,
1st Floor, Sector 34-A, Chandigarh-160022. Fax:
2612755. E-mail: chandigarh@jaquar.com

CHENNAI: Unit No. 705, Capital Towers,
180, Kodambakkam High Road, Nungambakkam,
Chennai-600034. Fax: 42144235.
E-mail: chennai@jaquar.com

COCHIN: No. 35/563, Opp. International Stadium,
Palarivattom P.O., Cochin-682025. Fax: 2340887/88.
E-mail: cochin@jaquar.com

GUWAHATI: Prag Plaza, 100 G.S. Road,
Bhangagarh, Guwahati - 781005.
Email: guwahati@jaquar.com

HYDERABAD: Unit No. 202,
Reliance Classic Banjara Hills, Road No.1,
Hyderabad-500034. Fax: 23379595.
E-mail: hyderabad@jaquar.com

INDORE: 304 - 307, Darshan Mall, 15/2,
Race Course Road, Above HSBC Bank, Indore.
E-mail: indore@jaquar.com

JAIPUR: Neelkanth, 1 Bhawani Singh Road,
Opp. Nehru Sehkar Bhawan,
C-Scheme, Jaipur-302 001.
E-mail: jaipur@jaquar.com

JAMMU: C/o Bonny Square, Near Vishal Mega
Mart,
National Highway, Bypass Road, Kunjwani,
Jammu, J&K - 180010.
Email: jammu@jaquar.com

JAMSHEDPUR: Road No. 2, Contractor's Area,
Bistupur, Jamshedpur-831001.
E-mail: jamshedpur@jaquar.com

KOLKATA: 2nd Floor, 55,
Chowringhee Road, Kolkata-700071.
E-mail: kolkata@jaquar.com

LUCKNOW: Ground Floor, Asha Bhawan,
27/II A, Gokhle Marg, Lucknow.
E-mail: lucknow@jaquar.com

LUDHIANA: 2nd Floor, Lodhi Complex,
Mall Road, Ludhiana.
E-mail: ludhiana@jaquar.com

MUMBAI: 5th Floor, Chheda Arcade,
A-1, Khira Nagar, S.V. Road, Santa Cruz West,
Mumbai-400054. Fax: 26613917.
E-mail: mumbai@jaquar.com

NEW DELHI: D-56, Defence Colony,
New Delhi-110 024. Fax: 24636809.
E-mail: delhincr@jaquar.com

PUNE: DSK Gandharva Heights, 5th Floor,
Office No.501, Near Hotel Pride Executive,
Ganeshkhind Road, Shivajinagar,
Pune-411005. Fax: 25513921.
E-mail: pune@jaquar.com

SILIGURI: Millennium Centre,
Opp. LIC Building, 137/1, Sevoke Road, Siliguri-
734001. Fax: 0353-777626.
E-mail: siliguri@jaquar.com

SURAT: 23, Siddhi Shopping Centre,
Nr. Agrasen Bhavan Char Rasta,
City Light Road, Surat.
E-mail: surat@jaquar.com

AREA REPRESENTATIVES:

AKOLA: 9823352288

AMRITSAR: 9815379722

AURANGABAD: 9822393765

BARODA: 9825036745

BILASPUR: 9630095012

CALICUT: 9447133932

COIMBATORE: 9884874121

DEHRADUN: 9837145508

DHANBAD: 9234682208

DHARAMSHALA: 9816710902

FARIDABAD: 9899111691

GOA: 9822125666, 9850962094

GURGAON: 9811416951

GUWAHATI: 9207049049, 0361-
2463051

GWALIOR: 9993097335

HISSAR: 9728123699

JABALPUR: 9981530765

JALANDHAR: 9815914466

JODHPUR: 9829076309

KANPUR: 9936455448

KARNAL: 9467648455

KOLHAPUR: 9850962094

NAGPUR: 9823072050

NASIK: 9850571601

NOIDA: 9899111691

PATNA: 9835036635

RAIPUR: 9893049275, 9630095014

RAJKOT: 9825036746, 9825036743

RANCHI: 9534207055

ROHTAK: 9728123699

SHIMLA: 9816026193

SOLAPUR: 9881066275

UDAIPUR: 9829026309

U.P. (WEST) & KUMAON: 9760012025, 9837065190

VARANASI: 9935166968

KATHMANDU: 9851043149, 9741126044

Orientation Centre - 33002233*

* Add nearest Orientation Centre city code before the number.

jaquar.com

Jaquar

experience bathing

EUROPE . ASIA-PACIFIC . MIDDLE EAST . AFRICA